


## APPLICATIONS

The **By-Box 6** allows to branch up to 6 **modules** through the micro-conduct to the optical wall outlet.

### Advantages:

- Perfect protection of fibres at the point of derivation.
- Easy and fast assembling.
- Installation in the encumbered or exiguous places
- Clamping of indoor riser cable
- Clamping of 6 indoor subscriber microduct

## MAIN SPECIFICATIONS

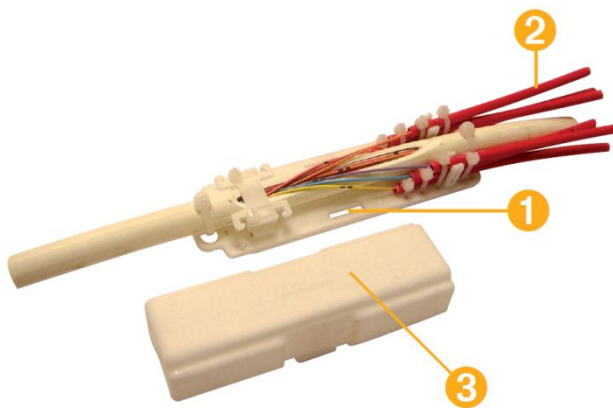

- ① **SOCLE**
- ② **TUBE DE PROTECTION Ø 5MM**
- ③ **CAPOT**

COVER: BODY WITH 6 OUTLETS FOR INDOOR SUBSCRIBER MICRODUCT Ø5mm

- Water tightness: IP30. (EN 60-529).
- Total dimension (LxWxD): 140x36.5x27mm.
- Total weight: 75 gr.
- Indoor riser cable ø range: 6 – 13,5mm
- 6 x Outlets ø range: 5mm
- Material: free halogen thermoplastic
- Fire resistance: UL 94 V0

## REFERENCES

Product	Pack quantity	Reference
By-Box 6	100	IC5085