

Data Sheet s4u[®] Fusion Splice Protector 45mm - heat shrinkable

Numerous applications

Distribution Frames, Termination Boxes, Splice Closures, Cabinets



Unique features

- fiber joint protection and improved mechanical strength
- simple installation
- hermetically sealed
- high temperature stability and humidity resistance
- transparent sleeve



Specifications

Operating temperature	-40° to 85°C
Shrinkage temperature	90° to 110°C
Dimensions:	
Length, L2	45 ± 1mm
Outer diameter after shrinkage	2.4mm
Fusion tube inside diameter, d1	1.6mm
Steel rod length, L1	40mm
Steel rod diameter, D2	1.2mm or 1.0mm

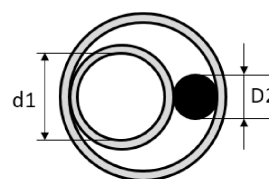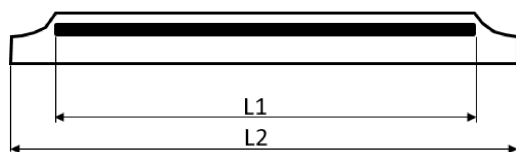

Order information

Order code	Description	Packing
PROT-SHR-45-2.4-1.0	Heat shrink splice protector, 45mm, 2.4mm outer diameter after shrinkage, 1.0mm steel rod	100
PROT-SHR-45-2.4-1.2	Heat shrink splice protector, 45mm, 2.4mm outer diameter after shrinkage, 1.2mm steel rod	100