

## Data Sheet s4u® Fusion Splice Protector 60mm - heat shrinkable

### Numerous applications

Distribution Frames, Termination Boxes, Splice Closures, Cabinets



### Unique features

- fiber joint protection and improved mechanical strength
- simple installation
- hermetically sealed
- high temperature stability and humidity resistance
- transparent sleeve



### Specifications

Operating temperature	-40° to 85°C
Shrinkage temperature	90° to 110°C
Dimensions:	
Length, L2	60 ± 1mm
Outer diameter after shrinkage	2.4mm
Fusion tube inside diameter, d1	1.6mm
Steel rod length, L1	55mm
Steel rod diameter, D2	1.0mm / 1.2mm

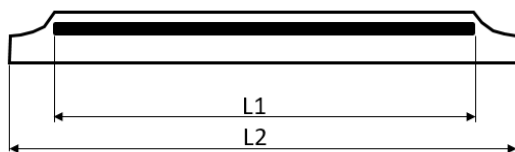

### Order information

Order code	Description	Packing
PROT-SHR-60-2.4-1.0	Heat shrink splice protector, 60mm, 2.4mm outer diameter after shrinkage, 1.0mm steel rod	100
PROT-SHR-60-2.4-1.2	Heat shrink splice protector, 60mm, 2.4mm outer diameter after shrinkage, 1.2mm steel rod	100