


A-DQ(ZN)2Y WBF 6×2,3 max. 72F

This cable is suitable for outdoor use. The cable has standard level of rodent protection.

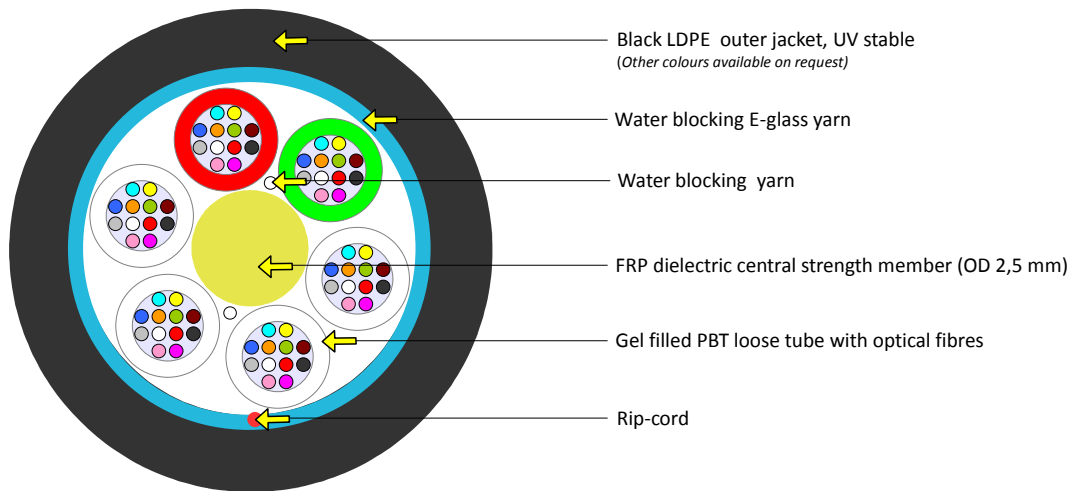

Fibre colour coding

According to IEC 60304

- | | |
|----------|-------------|
| 1 Red | 7 Brown |
| 2 Green | 8 Violet |
| 3 Blue | 9 Turquoise |
| 4 Yellow | 10 Black |
| 5 White | 11 Orange |
| 6 Grey | 12 Pink |

Other fibre colour sequences available on request

Tube colour coding

- 1 Red
2 Green
3-6 White

in the case of lower number of fibres some tubes are replaced by uncoloured fillers

Other tubes colour sequences available on request

Fibre Type

Single mode fiber 9/125
Multi mode fiber 50/125
Multi mode fiber 62,5/125

See the Fibre Specification sheet

Sheat Marking

Print colour White
Print method INK-Jet or Hot-foil
Print legend manufacturer's name, job number, type of cable, length marking @ 1 m intervals

Other print legends available on request

Order example

2100 m A-DQ(ZN)2Y WBF 72E9/125G.652D jacket colour BLK, cable specification FE 00

Mechanical and Environmental properties

Max. tensile strength	*E1A	3500 N
Crush resistance	*E3	2000 N/10cm
Impact resistance	*E4	3 impacts (w/20N.m)
Min. bend radius	*E11A	15× cable diameter
	*E11B	20× cable diameter (load)
Moisture resistance	*F5	passed
Compound flow	*E14	30 cm / 24h / 70°C passed
Temperature range	*F1	
	installation	-15 °C to +50 °C
	operation	-40 °C to +70 °C
	storage	-40 °C to +70 °C
Cable informative nominal weight (calc.)		83 kg/km
Standard put-up length		2100 m, 4100 m
Packaging		Plywood drum
Loose tube diameter		2,3 mm
Outer jacket thickness		1,3 ± 0,2 mm
Cable outer diameter		10,0 ± 0,4 mm
		(measured acc..to EN 60811-1-1)

* IEC 60794-1-2

Note: When installing or assembly under temperature bellow 5°C cable has to be stock in temp of 20°C at least 24h before installation.

Cable life time - minimum 30 years

