


Air Blown Unit

ID: **Z044**



KABELOVNA Děčín Podmokly s.r.o.
 Ústecká 840/33, 405 33 Děčín 5
 Czech Republic
 DIČ CZ26759993
 tel.: +420 412 706 222
 www.kabelovna.cz
 11.9.2017 ver. 8

Air Blown Unit 2,0mm max. 4F

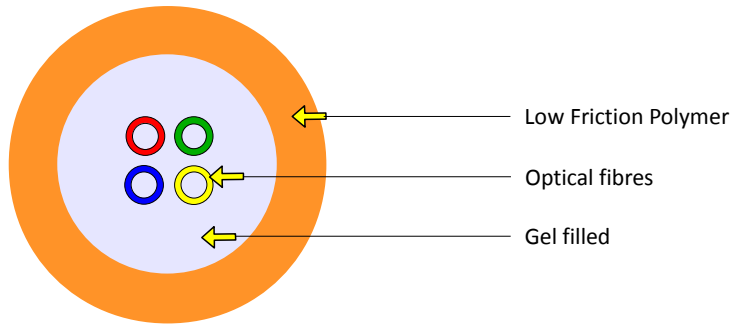

Mechanical and Environmental properties

Test	Value	Unit	Method
Cable outer diameter	2,0 ± 0,05	mm	EN 60811-203
Cable weight	4	kg/km	
Outer jacket thickness	0,6	mm	
Coefficient of friction	0,09	mm	
Max. tensile strength	70	N	EN 60794-1-21-E1
Crush resistance test	1000	N	EN 60794-1-21-E3
Impact resistance test	3	Nm	EN 60794-1-21-E4
Min. bend radius (no load)	10	× OD	EN 60794-1-21-E11a
Min. bend radius (load)	15	× OD	EN 60794-1-21-E11b
Moisture resistance test	pass		EN 60794-1-22-F5
Temperature range	Installation	-5 to + 50	°C
	Operation	-20 to + 70	°C
	Storage	-20 to + 70	°C

Cable life time - minimum 30 years

Sheat Marking

Print colour	White
Print method	INK-Jet
Print legend	Manufacturer's name, job number, type of cable, length marking @ 1 m intervals

Other print legends available on request

Fibre colour coding

According to IEC 60304

1	Red
2	Green
3	Blue
4	Yellow

Other fibre colour sequences available on request

Packing

Depending on ordered put-up lengths

