


L-Series Adapter Plate

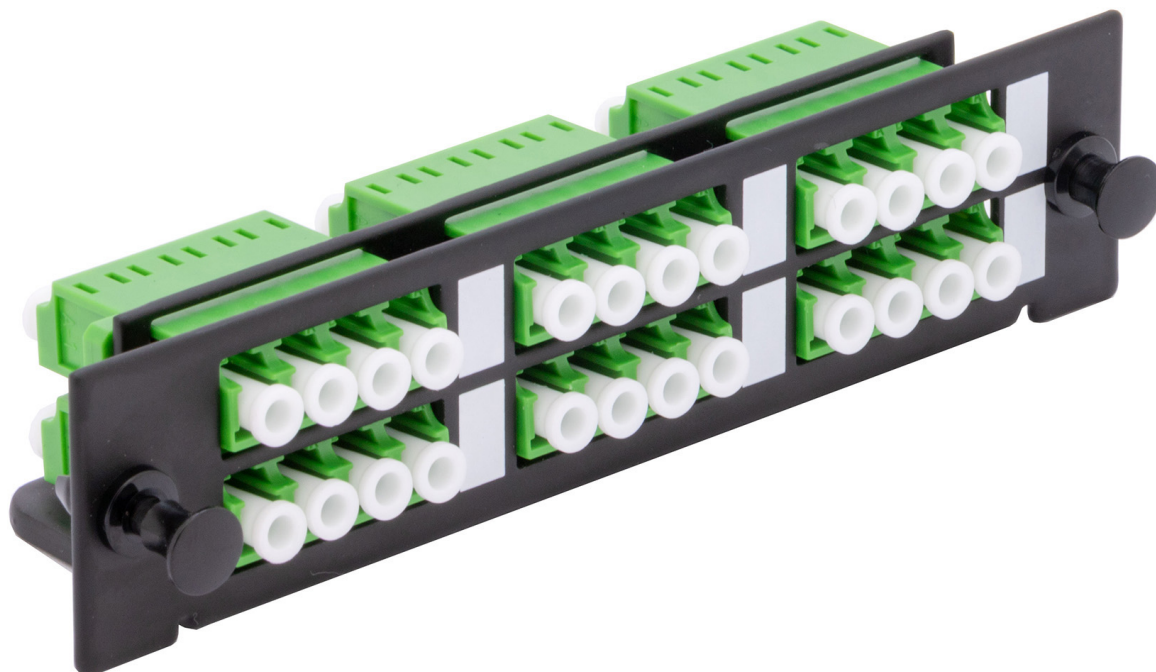

Description

The versatile L-Series Adapter Plate can be used in the complete range of L-Series housings, panels, and wall boxes and forms the heart of the solution. The plates are interchangeable allowing support for legacy connections using older connector types whilst supporting migration to small form factor connectors (such as LC) within the same housing. A wide range of connectivity types offers a flexible solution to the user and are easily changed using snap pin mountings. The L-Series Adapter Plate has many applications including data centers, telecommunication networks, security networks, demarcation points, and more.

The AFL Hyperscale L-Series is compatible with the industry-standard LGX format.

Features and Benefits

- For use in all compatible L-Series housings, panels, and wall boxes
- Interchangeable for a wide range of products
- Ranges from low- to high-density fiber counts
- Supplied with adapters pre-loaded
- Suitable for SC, LC, ST, FC & E2000 adapters
- Easy to install with either fastening pips or screw-in
- Robust steel design



Applications

- Data center infrastructure
- Fiber channel
- Storage Area Networks (SANs)


Specifications

Technical Specification	
Height	30mm
Width	31mm
Length	129mm
Net weight	100g
Packed weight	150g
Packaged dimensions	60mm (H) X 45mm (W) X 140mm (L)
Material sheet	Steel
Material thickness	1.2mm
Color	Black
Material coating	Electro Static Powder Coating
Operating temperature	-40°C to + 60°C
Materials compliant to	RoHS, Reach, SVHC
Designed in accordance with	TIA/EIA 568.C, ISO/IEC 11801, EN 50173, IEC 60304, IEC 61754, EN 297-1

Technical Drawing

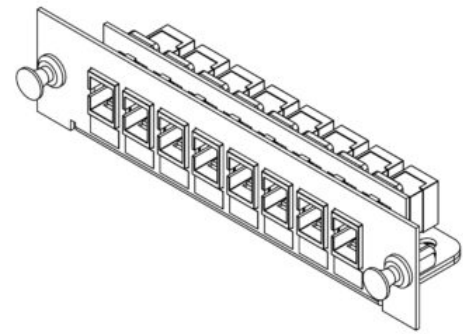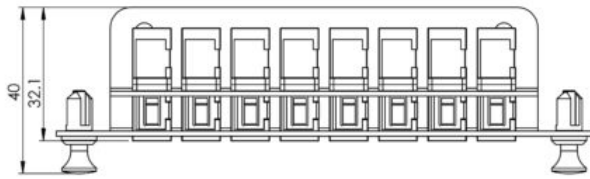

Isometric View



Ordering Information

Code	Fiber Type	Code	Fiber Count	End A
F	S SM UPC Adapters	LAXXBX	AX LC	L01 - 8 Port (SC Simplex / LC Duplex)
	M MM Adapters		BX LCA	L02 - 8 Port (FC/ST)
	Q MM Aqua adapters		DX SC	L03 - 6 Port (SC Duplex / LC Quad)
			EX SCA	L04 - Blank Plate
			HX FC	L06 - 8 Port (MPO)
			JX FCA	
			KX ST	
			LX E2	
			MX E2A	
			FX MTRJ	
			UX MPO	

Legacy Ordering Information

L01 - 8 x LC Duplex	L01 - 8 x SC Simplex	L01 - 8 x E2000	L01 - 8 x MTRJ
Multimode: L01LCM08 Adapter: LCDPXBEIGE	Multimode: L01SCM08 Adapter: SCUSPHRBEIGE	Multimode: L01E2M08 Adapter: E2UBEIGE	L01MTM08 Adapter: MTRJUNITER
Single-mode: L01LCS08 Adapter: LCDPXBLUE	Single-mode: L01SCS08 Adapter: SCUSZR02	Single-mode: L01E2S08 Adapter: E2UBLUE	
APC Single-mode: L01LCA08 Adapter: LCAPCUDGREEN	APC Single-mode: L01SCA08 Adapter: SCAPCUSGREEN	APC Single-mode: L01E2A08 Adapter: EZAPCUGREEN	
L02 - 8 x FC	L02 - 8 x ST	L03 - 6 x SC Duplex	L03 - 6 x LC QUAD



 Multimode: L02FCM08 Adapter: FCUZR02-D	 Multimode: L02STM08 Adapter: STUPHBR	 Multimode: L03SCM06 Adapter: SCUDPHBRBEIGE	 Multimode: L03LQM06/AQ
 Single-mode: L02FC508 Adapter: FCUPHBR-D	 Single-mode: L02ST508 Adapter: STUZR02	 Single-mode: L03SC506 Adapter: SCUDZR02BLUE	 Single-mode: L03LQ506
 APC Single-mode: L02FCA08 Adapter: FCAPCUZR02-D		 APC Single-mode: L03SCA06 Adapter: SCAPCUDGREEN	 APC Single-mode: L03LQA06
 Blank Plate L04	 L06 - 8 x MTP L06MPO08		


To order the front plate in gray, please add /G on the end of the part numbers listed above. Example: L01E2A08/G

Regional Availability

<p>USA</p> <p>+1-866-814-8615 usasales@aflhyperscale.com</p>	<p>EMEA</p> <p>+44 1908 441 144 emeasales@aflhyperscale.com</p>	<p>INDIA</p> <p>+91 80 46874687 indiasales@aflhyperscale.com</p>	<p>APAC (excluding India)</p> <p>+86 755 2561 3694 apacsales@aflhyperscale.com</p>
---	--	---	---

Additional Images

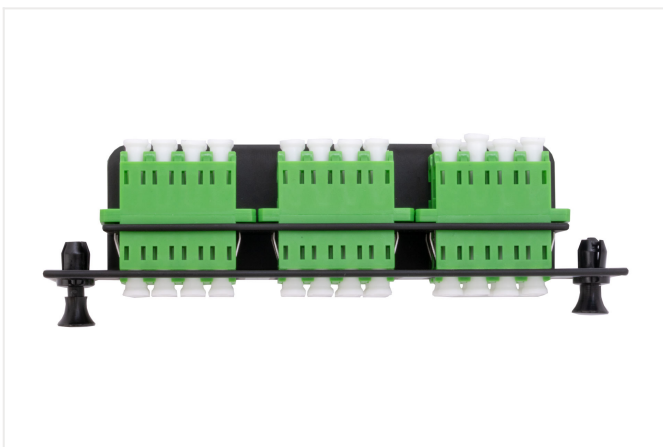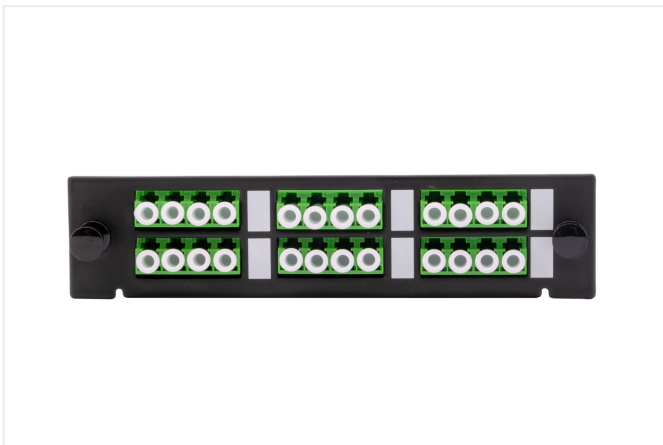

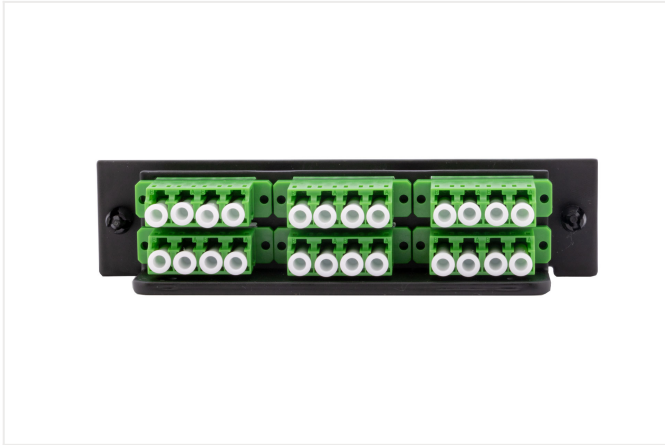

Related Products

